




Manual Remote Quick-Start Guide

A Power Indicator	E Modeling Lamp Button	I Beep Button
B Power Button	F Test Button	J Battery Compartment
C LCD Screen	G Flash Power Buttons	K Micro USB Port
D Channel Button	H Group Button	L Hot Shoe Interface

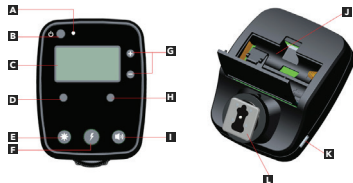

Turning the Unit On & Off	Modeling Lamp	Beep Notifier
<ol style="list-style-type: none"> 1. Install 2x AAA batteries. 2. Press and hold the power button B for 2 seconds to turn the unit on or off. 	<p>Press E once to set modeling lamp to proportional brightness, once again to set modeling lamp to 100% brightness, and a third time to turn the modeling lamp off.</p>	<p>Press I to toggle the audible remote adjustment and recycle tone on or off.</p>
Setting Groups & Channels	Technical Specifications	Compatibility
<p>Press D to toggle through channels 1-15.</p> <ul style="list-style-type: none"> • Both the flash head and the remote must be on the same channel. <p>Press H to toggle through groups A-H.</p> <ul style="list-style-type: none"> • Assigning groups allows you to control multiple sets of lights via the remote. • Setting the group to "-" by pressing and holding H disables all communication. 	<ul style="list-style-type: none"> • Frequency: 2.4GHz • Voltage: 2.0 - 3.4V • Sync Speed: 1/250s • Wireless Range: 100 meters 	<p>This remote is compatible with the Interfit S1, Interfit S1a, Honey Badger, Badger Unleashed, and all other Interfit premium lights with gen. 1 remote support.</p> <ul style="list-style-type: none"> • When setting groups, the S1 and S1a can only be used on groups A-C and channels 1-8. • This remote cannot be used in TTL or HSS (High-Speed Sync) mode.
	Micro USB	
	<p>The micro USB port can be used to supply constant power to your remote while in use.</p>	